


## SLIM-DOORSTRIKE

### PROFESSIONAL TECNODIMENSIONE ELECTRICAL DOOR STRIKE



**FOR FLUSH  
MOUNTING**

Anti-panic "fail-safe" model (designed to disengage in the event of power failure) with RR sensor to control the door status and front plate for recess-mounting. Available on request with a mini spring bolt and adjustable self-lubricating bolt.

One unit...  
for **3** different needs.

**1<sup>st</sup>** Immediate installation ZEROTIME = **Click&Go**


**2<sup>nd</sup>** Ultra-slim and compact design to suit all door frame sections = **SLIM**

**3<sup>rd</sup>** Sensor controlling the door status and adjustable counter latch = **REGOSTRIKE**

**4<sup>th</sup>** fail-safe; it automatically unlocks in the event of power failure freeing the door for emergency exit also in the event of fire = **FAIL-SAFE**

PERFECT FOR STERILE ROOMS.


**1<sup>st</sup> Click&Go**

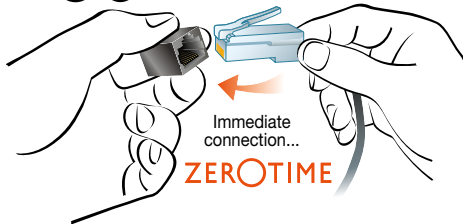

Insert the plug connector... snap it in place...  
that's all you need  
for a perfectly working system...

**Click&Go!**

**2<sup>nd</sup>  
SLIM**

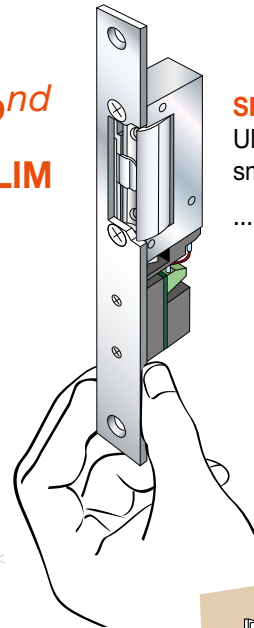

**SLIM-MICROREDLOCK**

Ultra-slim and compact for very small door frame profiles...


... it's **SLIM!**

**3<sup>rd</sup>  
REGOSTRIKE**

**SLIM-DOORSTRIKE**

Supplied with a sensor that controls the door status (open/closed) and the penetration of the spring bolt (also adjustable) during closing, and with a counter latch that can be adjusted to obtain a perfect compensation and alignment of the wing...

... it's **REGOSTRIKE!**

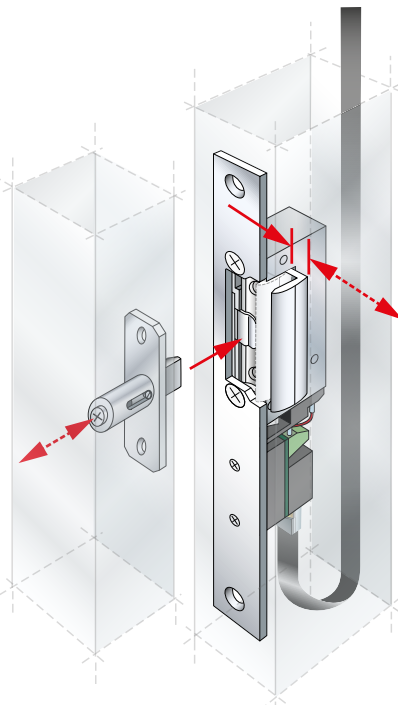


**4<sup>th</sup>  
FAIL-SAFE**



**SLIM-DOORSTRIKE**

Automatic fail-safe unlock = bolt "in" without power, bolt "out" when powered. In the event of fire or power failure it automatically unlocks freeing the exit...

... it's **FAIL-SAFE!**

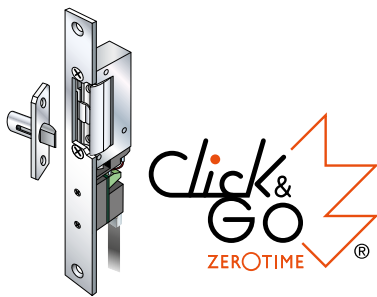

# PROFESSIONAL ELECTRICAL DOOR STRIKE

## SLIM-DOORSTRIKE

With quick fitting 8 pole RJ45 plug to simplify installation and wiring

### Export Product-list

January 2024



**TECNODIMENSIONE®**

Electrical door strike for recess-mounting.  
Ideal for "clean rooms".

ordering  
information


Q.ty

MODELS


N°

### SLIM-DOORSTRIKE "CLICK & GO" with mini spring bolt

For conventional mounting

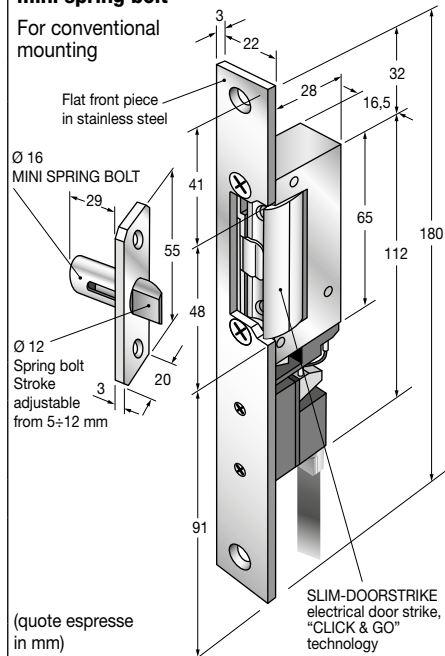

### EXAMPLE OF RECESS-MOUNTING ON THE DOOR FRAME

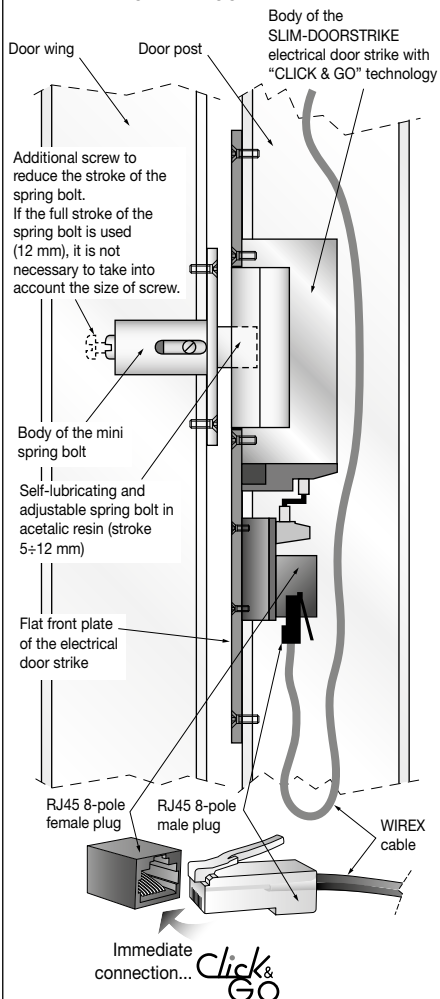

Series SLIM-DOORSTRIKE (fail-safe) "anti-panic" model = Disengages in the event of power failure.  
If a fire breaks out and no power is available, the electrical SLIM-DOORSTRIKE automatically disengages to allow a safe evacuation.

### Models for 12 Vdc power supply

SLIM-DOORSTRIKE electrical door strike for flush mounting, "CLICK & GO" technology, with one 8-pole RJ45-8 quick fitting female connector for immediate connections.  
- Fail-safe (anti-panic) version with 100% ED coil for a continuous operation  
- RR microswitch sensor controlling the door status  
- Adjustable counter latch  
- 12 Vdc/280 mA power supply  
Supplied with flat front plate in stainless steel.

0158J12RW

### Models for 24Vdc power supply

SLIM-DOORSTRIKE electrical door strike for flush mounting, "CLICK & GO" technology, same characteristics as the model above but for a 24Vdc/140 mA power supply.

0158J14RW


### Accessory (optional)

Mini spring bolt for recess-mounting with adjustable spring bolt. Body with recess-mounting flange in anodised machined aluminium with a "silver" finish. Self-lubricating spring bolt in acetalic resin with stroke adjustable from 5 to 12 mm.

004910K

Note: on request, electrical SLIM-DOORSTRIKE can even be supplied with front plate in anodised machined aluminium, with customised shape, for alignment and mounting without visible cuts on custom profiles with rounded sections ("CLEAN" versions).

### Electrical SLIM-DOORSTRIKE with RR sensor to control the door status and adjustable counter latch

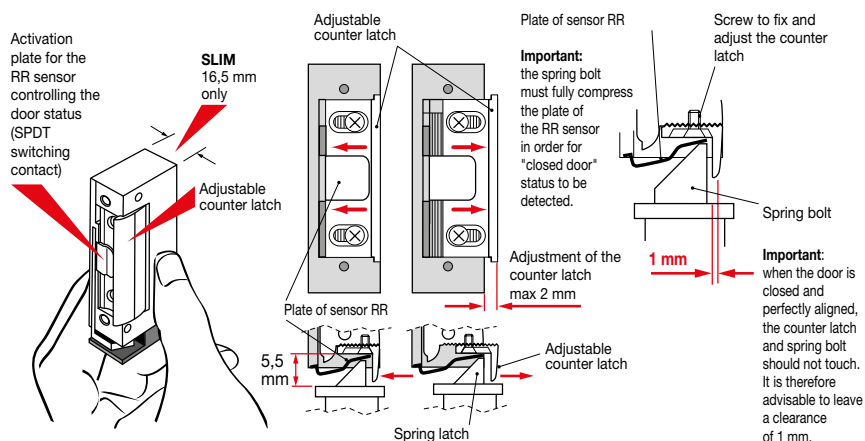

### Adjustable mini spring bolt to quickly compensate the port

