


Ultra-slim and super-compact in a unified & convertible format.

**SLIM &
MODULAR**

with technology
Click&Go
ZEROTIME®



Insert the plug connector...
snap it in place...
that's all you need
for a perfectly working
system...

Click&Go!


Stop/go display
SLIM-DUALUX

Stop/go sensorized display
SLIM-DUALUX No-touch

Push-button unit
SLIM-DUALPUSH

Push-button with
"mushroom"
SLIM-HELPPUSH

Intercom unit
SLIM-DUALVOX

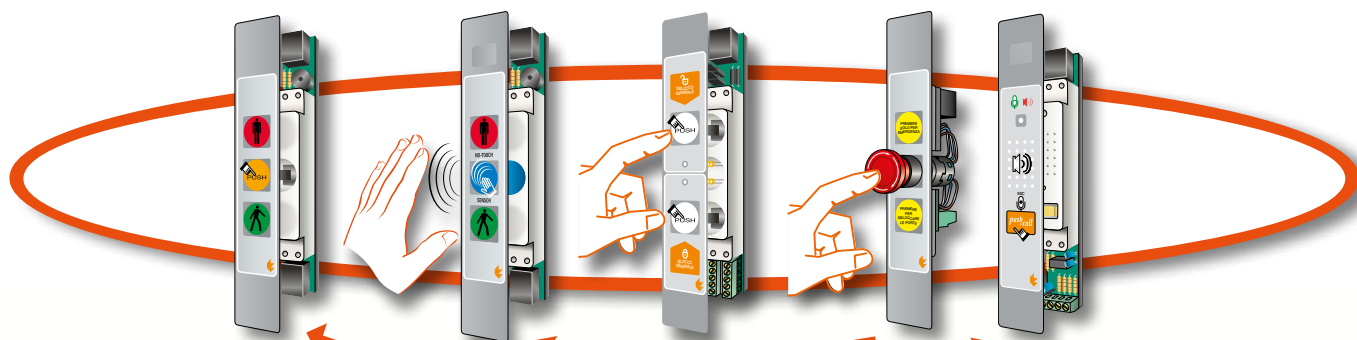


Unified module because....

A full SLIM & MODULAR range of devices with different functions, operations and purposes (stop and go displays, entryphones, keypads, such as code keypads, badge readers and micro stop and go display control units of the same series...) designed and made keeping a single module of the same size for all as a base element.

In fact, all the devices have the same appearance, size and modularity to be interchangeable and housed in the same unified chasing of the previous lock.

Convertible because...


Using unified flanges, cases and boxes, any unified SLIM & MODULAR device is convertible into 5 different types that can be installed in any way, next to the door, based on the assembly needs found in the field.

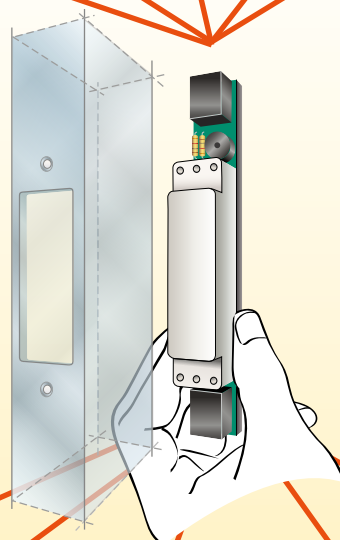

Assembly type

1

fully aligned concealed
for recess-mounting
without flange
on the same plane of
the door frame panel




Unified body of modular device recess mounted set flush into surface door frame level

Assembly type

2

fully aligned at milling
for recess-mounting
with front flange
on the same plane
of the panel surface




Unified body of modular device with front flange

Assembly type

3

for conventional flush mounting
with front flange
overlapping door frame




Unified body of modular device with conventional front flange

Assembly type

4

for surface mounting
with using housing

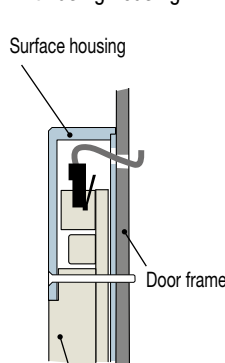











Unified body of modular device included in housing

Assembly type

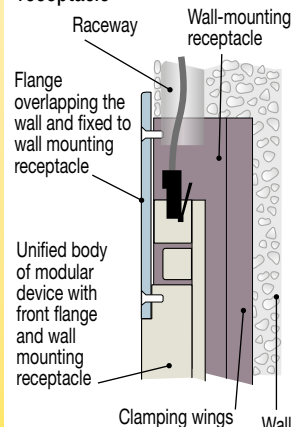5

for recessed wall-mounting
with flange and wall-mounting
receptacle




	<div> <div>  </div> <div> SLIM-DUALUX PROFESSIONAL STOP/GO DISPLAYS With quick fitting PLUG RJ45 - 8 poli for a more practical installation and immediate cable routing </div> </div> <div> <ul style="list-style-type: none"> - With 2 8-pole quick fitting RJ45-8 connecting plugs + 1 dummy load (end of line adapter). - Green/red lights + buzzer + multifunctional push button with "dry" changeover contacts (no voltage). - 1 self-adhesive cover in polycarbonate, 180 x 30 mm, R2,5, thickness 0.3 mm with international symbols, available in 7 colours. </div>	<div> Export Product-list January 2024  TECNODIMENSIONE® </div> <div> <div>Ordering information </div> <div></div> <div>Q.ty</div> </div>																		
Assembly type 1 fully aligned concealed for recess-mounting without flange on the same plane of the door frame panel * 	<table> <tr> <th>Models for 12Vdc/70mA power supply</th><th>MODELS</th><th>N°</th></tr> <tr> <td>SLIM-DUALUX stop and go display type 1 "CLICK & GO" technology with fully aligned concealed for recess-mounting on the same plane of the door frame panel without flange. Ideal to achieve a "smooth" surface (without roughness) that is easy to clean. Supplied with diffuser screen and gap G for sections with a thickness of 1.6 mm. Complete with self-adhesive cover designed to be applied after the final installation of the system. * In this case it is advisable to prepare the recess during the door frame machining.</td><td>034981CW2U</td><td></td></tr> <tr> <td>Same with diffuser screen and gap G for sections with a thickness of 3 mm.</td><td>034981CW2U3</td><td></td></tr> <tr> <th>Models for 24Vdc/40mA power supply (on request)</th><td></td><td></td></tr> <tr> <td>SLIM-DUALUX stop and go display same but with 24 Vdc/40mA power supply with diffuser screen with G gap for sections with a thickness of 1.6 mm</td><td>034981CW4U</td><td></td></tr> <tr> <td>Same with diffuser screen and gap G for sections with a thickness of 3 mm.</td><td>034981CW4U3</td><td></td></tr> </table>	Models for 12Vdc/70mA power supply	MODELS	N°	SLIM-DUALUX stop and go display type 1 "CLICK & GO" technology with fully aligned concealed for recess-mounting on the same plane of the door frame panel without flange. Ideal to achieve a "smooth" surface (without roughness) that is easy to clean. Supplied with diffuser screen and gap G for sections with a thickness of 1.6 mm. Complete with self-adhesive cover designed to be applied after the final installation of the system. * In this case it is advisable to prepare the recess during the door frame machining.	034981CW2U		Same with diffuser screen and gap G for sections with a thickness of 3 mm.	034981CW2U3		Models for 24Vdc/40mA power supply (on request)			SLIM-DUALUX stop and go display same but with 24 Vdc/40mA power supply with diffuser screen with G gap for sections with a thickness of 1.6 mm	034981CW4U		Same with diffuser screen and gap G for sections with a thickness of 3 mm.	034981CW4U3		
Models for 12Vdc/70mA power supply	MODELS	N°																		
SLIM-DUALUX stop and go display type 1 "CLICK & GO" technology with fully aligned concealed for recess-mounting on the same plane of the door frame panel without flange. Ideal to achieve a "smooth" surface (without roughness) that is easy to clean. Supplied with diffuser screen and gap G for sections with a thickness of 1.6 mm. Complete with self-adhesive cover designed to be applied after the final installation of the system. * In this case it is advisable to prepare the recess during the door frame machining.	034981CW2U																			
Same with diffuser screen and gap G for sections with a thickness of 3 mm.	034981CW2U3																			
Models for 24Vdc/40mA power supply (on request)																				
SLIM-DUALUX stop and go display same but with 24 Vdc/40mA power supply with diffuser screen with G gap for sections with a thickness of 1.6 mm	034981CW4U																			
Same with diffuser screen and gap G for sections with a thickness of 3 mm.	034981CW4U3																			
Assembly type 2 fully aligned at milling for recess-mounting with front flange on the same plane of the panel surface ♦ 	<table> <tr> <th>Models for 12Vdc/70mA power supply</th><th>MODELS</th><th>N°</th></tr> <tr> <td>SLIM-DUALUX stop and go display type 2 "CLICK & GO" technology for aligned recessed flush fitting in bottom of panel using front flange (e.g. To mount on wall panel next to the door frame on the post where no chasing can be carried out). Supplied with front flange in anodized aluminium with "silver" finish - 250 x 50 mm, thickness 2.5 mm for recess-mounting on the same plane of the panel surface for aligned recessed flush fitting in bottom of plane using front flange. Cover pre-assembled and fixed into the flange niche. ♦ In this case, it is advisable to prepare sunk milling during the panel machining phase.</td><td>034982CW2U</td><td></td></tr> <tr> <th>Models for 24Vdc/40mA power supply (on request)</th><td></td><td></td></tr> <tr> <td>SLIM-DUALUX stop and go display same but with 24 Vdc/40mA power supply.</td><td>034982CW4U</td><td></td></tr> </table>	Models for 12Vdc/70mA power supply	MODELS	N°	SLIM-DUALUX stop and go display type 2 "CLICK & GO" technology for aligned recessed flush fitting in bottom of panel using front flange (e.g. To mount on wall panel next to the door frame on the post where no chasing can be carried out). Supplied with front flange in anodized aluminium with "silver" finish - 250 x 50 mm, thickness 2.5 mm for recess-mounting on the same plane of the panel surface for aligned recessed flush fitting in bottom of plane using front flange. Cover pre-assembled and fixed into the flange niche. ♦ In this case, it is advisable to prepare sunk milling during the panel machining phase.	034982CW2U		Models for 24Vdc/40mA power supply (on request)			SLIM-DUALUX stop and go display same but with 24 Vdc/40mA power supply.	034982CW4U								
Models for 12Vdc/70mA power supply	MODELS	N°																		
SLIM-DUALUX stop and go display type 2 "CLICK & GO" technology for aligned recessed flush fitting in bottom of panel using front flange (e.g. To mount on wall panel next to the door frame on the post where no chasing can be carried out). Supplied with front flange in anodized aluminium with "silver" finish - 250 x 50 mm, thickness 2.5 mm for recess-mounting on the same plane of the panel surface for aligned recessed flush fitting in bottom of plane using front flange. Cover pre-assembled and fixed into the flange niche. ♦ In this case, it is advisable to prepare sunk milling during the panel machining phase.	034982CW2U																			
Models for 24Vdc/40mA power supply (on request)																				
SLIM-DUALUX stop and go display same but with 24 Vdc/40mA power supply.	034982CW4U																			
Assembly type 3 for conventional flush mounting with front flange overlapping door frame 	<table> <tr> <th>Models for 12Vdc/70mA power supply</th><th>MODELS</th><th>N°</th></tr> <tr> <td>SLIM-DUALUX stop and go display type 3 "CLICK & GO" technology for traditional recessed fitting using flange. Supplied with front flange in anodized aluminium with "silver" finish - 250 x 50mm, thickness 4 mm for flush mounting. Cover pre-assembled and fixed into the flange niche. Mounting can be carried out "on site", directly onto the installed door frame.</td><td>034983CW2U</td><td></td></tr> <tr> <th>Models for 24Vdc/40mA power supply (on request)</th><td></td><td></td></tr> <tr> <td>SLIM-DUALUX stop and go display same but with 24 Vdc/40mA power supply</td><td>034983CW4U</td><td></td></tr> </table>	Models for 12Vdc/70mA power supply	MODELS	N°	SLIM-DUALUX stop and go display type 3 "CLICK & GO" technology for traditional recessed fitting using flange. Supplied with front flange in anodized aluminium with "silver" finish - 250 x 50mm, thickness 4 mm for flush mounting. Cover pre-assembled and fixed into the flange niche. Mounting can be carried out "on site", directly onto the installed door frame.	034983CW2U		Models for 24Vdc/40mA power supply (on request)			SLIM-DUALUX stop and go display same but with 24 Vdc/40mA power supply	034983CW4U								
Models for 12Vdc/70mA power supply	MODELS	N°																		
SLIM-DUALUX stop and go display type 3 "CLICK & GO" technology for traditional recessed fitting using flange. Supplied with front flange in anodized aluminium with "silver" finish - 250 x 50mm, thickness 4 mm for flush mounting. Cover pre-assembled and fixed into the flange niche. Mounting can be carried out "on site", directly onto the installed door frame.	034983CW2U																			
Models for 24Vdc/40mA power supply (on request)																				
SLIM-DUALUX stop and go display same but with 24 Vdc/40mA power supply	034983CW4U																			
Assembly type 4 for surface mounting with using housing 	<table> <tr> <th>Models for 12Vdc/70mA power supply</th><th>MODELS</th><th>N°</th></tr> <tr> <td>SLIM-DUALUX stop and go display type 4 "CLICK & GO" technology for mounting placed on surface using housing. With extra-strong protective housing, made in anodized silver finish aluminium (35 x 25 x 215 mm). Self-adhesive cover in polycarbonate, provided separately and designed to be used as final cover to hide the 4 fixing screws of the housing on the door frame. Useful when you wish to avoid recess-mounting or cuts on the door frame.</td><td>034984CW2U</td><td></td></tr> <tr> <th>Models for 24Vdc/40mA power supply (on request)</th><td></td><td></td></tr> <tr> <td>SLIM-DUALUX stop and go display same but with 24 Vdc/40mA power supply.</td><td>034984CW4U</td><td></td></tr> </table>	Models for 12Vdc/70mA power supply	MODELS	N°	SLIM-DUALUX stop and go display type 4 "CLICK & GO" technology for mounting placed on surface using housing. With extra-strong protective housing, made in anodized silver finish aluminium (35 x 25 x 215 mm). Self-adhesive cover in polycarbonate, provided separately and designed to be used as final cover to hide the 4 fixing screws of the housing on the door frame. Useful when you wish to avoid recess-mounting or cuts on the door frame.	034984CW2U		Models for 24Vdc/40mA power supply (on request)			SLIM-DUALUX stop and go display same but with 24 Vdc/40mA power supply.	034984CW4U								
Models for 12Vdc/70mA power supply	MODELS	N°																		
SLIM-DUALUX stop and go display type 4 "CLICK & GO" technology for mounting placed on surface using housing. With extra-strong protective housing, made in anodized silver finish aluminium (35 x 25 x 215 mm). Self-adhesive cover in polycarbonate, provided separately and designed to be used as final cover to hide the 4 fixing screws of the housing on the door frame. Useful when you wish to avoid recess-mounting or cuts on the door frame.	034984CW2U																			
Models for 24Vdc/40mA power supply (on request)																				
SLIM-DUALUX stop and go display same but with 24 Vdc/40mA power supply.	034984CW4U																			
Assembly type 5 for recessed wall-mounting with flange and wall-mounting receptacle 	<table> <tr> <th>Models for 12Vdc/70mA power supply</th><th>MODELS</th><th>N°</th></tr> <tr> <td>SLIM-DUALUX stop and go display type 5 "CLICK & GO" technology for recessed assembly using flange and wall box. Supplied with front flange in anodized aluminium with "silver" finish - 250 x 50 mm, thickness 4 mm, to be fixed to the housing by placing on wall surface. Self-adhesive cover in polycarbonate pre-assembled and fixed into the flange niche. Also fitted with wall box with "wings" for rapid anchoring (65 x 30 x 230 mm), in plastic taken from single block to be assembled "in a niche" in the wall to house the body of the stop and go display. Wall niche and cable channel to be prepared beforehand.</td><td>034985CW2U</td><td></td></tr> <tr> <th>Models for 24Vdc/40mA power supply (on request)</th><td></td><td></td></tr> <tr> <td>SLIM-DUALUX stop and go display same but with 24 Vdc/40mA power supply.</td><td>034985CW4U</td><td></td></tr> </table>	Models for 12Vdc/70mA power supply	MODELS	N°	SLIM-DUALUX stop and go display type 5 "CLICK & GO" technology for recessed assembly using flange and wall box. Supplied with front flange in anodized aluminium with "silver" finish - 250 x 50 mm, thickness 4 mm, to be fixed to the housing by placing on wall surface. Self-adhesive cover in polycarbonate pre-assembled and fixed into the flange niche. Also fitted with wall box with "wings" for rapid anchoring (65 x 30 x 230 mm), in plastic taken from single block to be assembled "in a niche" in the wall to house the body of the stop and go display. Wall niche and cable channel to be prepared beforehand.	034985CW2U		Models for 24Vdc/40mA power supply (on request)			SLIM-DUALUX stop and go display same but with 24 Vdc/40mA power supply.	034985CW4U								
Models for 12Vdc/70mA power supply	MODELS	N°																		
SLIM-DUALUX stop and go display type 5 "CLICK & GO" technology for recessed assembly using flange and wall box. Supplied with front flange in anodized aluminium with "silver" finish - 250 x 50 mm, thickness 4 mm, to be fixed to the housing by placing on wall surface. Self-adhesive cover in polycarbonate pre-assembled and fixed into the flange niche. Also fitted with wall box with "wings" for rapid anchoring (65 x 30 x 230 mm), in plastic taken from single block to be assembled "in a niche" in the wall to house the body of the stop and go display. Wall niche and cable channel to be prepared beforehand.	034985CW2U																			
Models for 24Vdc/40mA power supply (on request)																				
SLIM-DUALUX stop and go display same but with 24 Vdc/40mA power supply.	034985CW4U																			

Special configurations available at extra charge: Cover with your logo and/or customized.


For sizes, measurements and details of chasing, application examples and connection diagrams, see page 21.

SLIM-DUALUX STOP & GO DISPLAYS - sizes, application examples and connection diagram


Assembly type ① fully aligned concealed for recess-mounting on the same plane of the door frame panel without a flange

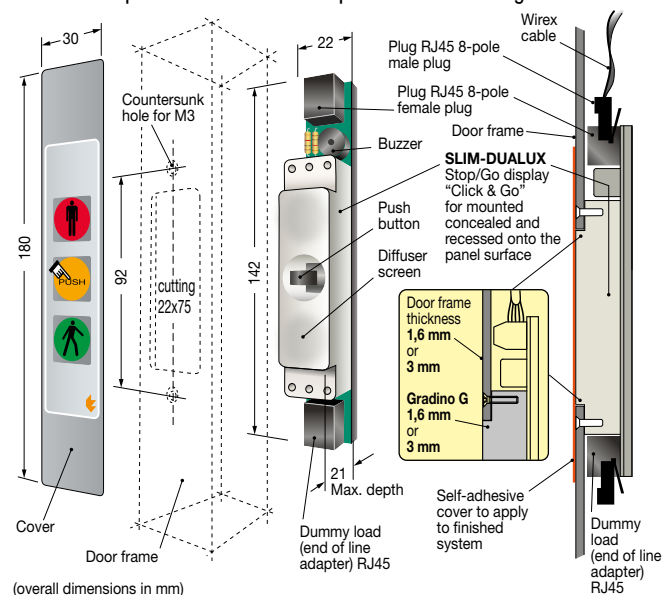


Assembly type ② fully aligned at milling for recess-mounting with front flange on the same plane of the panel surface

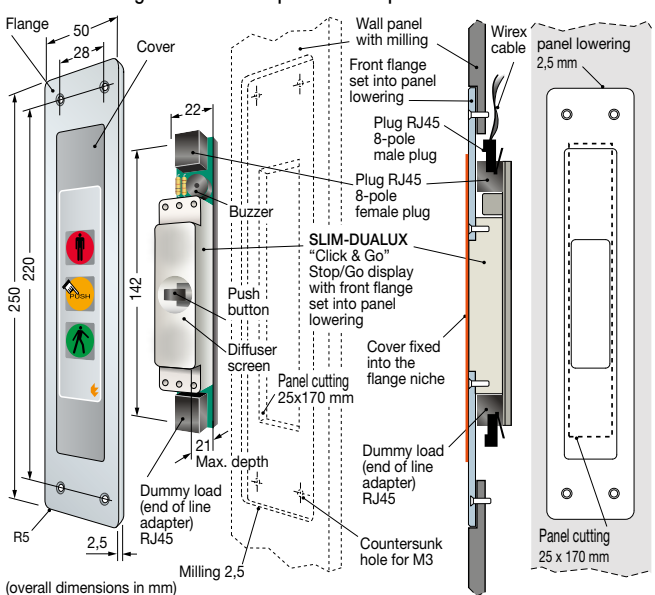


Assembly type ③ for conventional flush mounting with front flange overlapping door frame

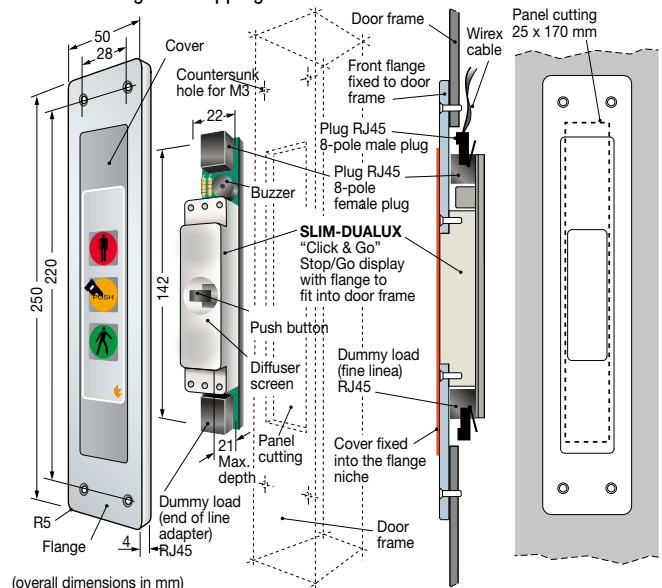


Assembly type ④ for surface mounting with using housing

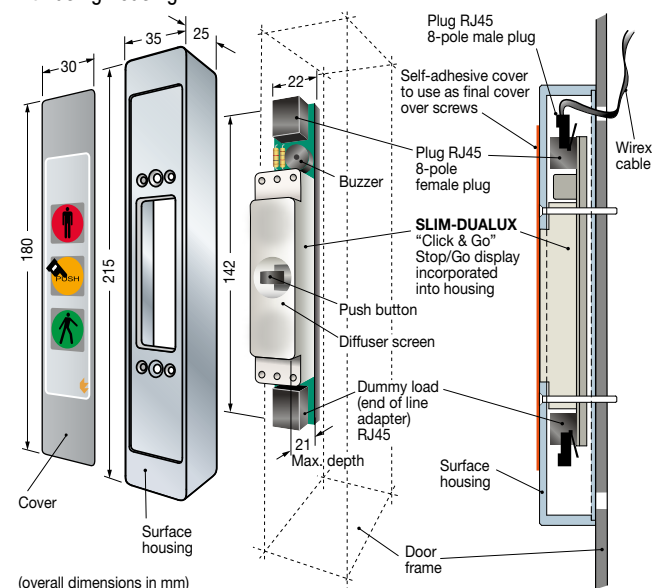

Assembly type ⑤ for recessed mounting in wall-mounting receptacle with flange and wall-mounting receptacle

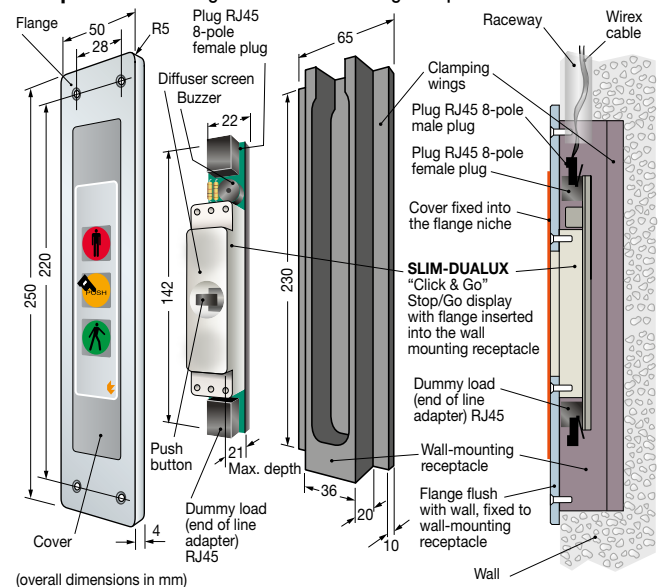







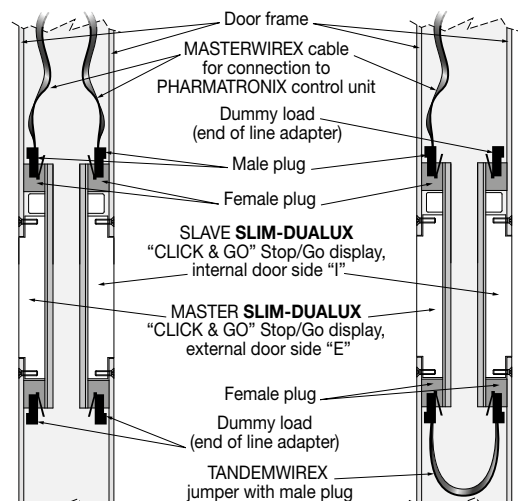


Examples of Wirex fast connecting cables for "CLICK & GO" models



SINGLE CONFIGURATION
Each Stop/Go display has its own MASTERWIREX control cable.



MASTER-SLAVE CONFIGURATION
Two Stop/Go displays coupled in "tandem" by means of a TANDEMWIREX jumper and one MASTERWIREX control cable.

		<h2>SLIM-DUALUX No-touch</h2> <h3>PROFESSIONAL SENSORIZED STOP/GO DISPLAYS</h3> <p>With quick fitting PLUG RJ45 - 8 poli for a more practical installation and immediate cable routing</p> <ul style="list-style-type: none">- With 2 8-pole quick fitting RJ45-8 connecting plugs + 1 dummy load (end of line adapter).- Green/red light + buzzer.- Equipped (instead of manual pressure button) with an infrared sensor that "sees" a presence up to 10 cm away. The "contactless" door-opening command and/or alarm works automatically by bringing the hand close, without touching anything.- Timed command with exit relay that starts and remains activated for 8 seconds, each time the hand comes near the No-touch sensor's range of action.- 1 adhesive cover in polycarbonate, 180 x 30 mm, R2,5, thickness 0.3 mm with 7-colour international symbols.	<p>Export Product-list January 2024</p>  <p>TECNODINENSIONE® Click & Go ZEROTIME®</p> <p>ordering information </p> <p>MODELS</p> <p>Q.ty N°</p>
Models for 12Vdc/70mA power supply			
<p>Assembly type 1 fully aligned concealed for recess-mounting without flange on the same plane of the door frame panel *</p> 	<p>SLIM-DUALUX No-touch stop and go display type 1 "CLICK & GO" technology with fully aligned concealed for recess-mounting on the same plane of the door frame panel without flange.</p> <p>Ideal to achieve a "smooth" surface (without roughness) that is easy to clean.</p> <p>Supplied with diffuser screen and gap G for sections with a thickness of 1.6 mm.</p> <p>Complete with self-adhesive cover designed to be applied after the final installation of the system.</p> <p>* In this case it is advisable to prepare the recess during the door frame machining.</p>	<p>034981HW2U</p>	
	<p>Same with diffuser screen and gap G for sections with a thickness of 3 mm.</p>	<p>034981HW2U3</p>	
<p>Assembly type 2 fully aligned at milling for recess-mounting with front flange on the same plane of the panel surface ♦</p> 	<p>SLIM-DUALUX No-touch stop and go display type 2 "CLICK & GO" technology for aligned recessed flush fitting in bottom of panel using front flange (e.g. To mount on wall panel next to the door frame on the post where no chasing can be carried out).</p> <p>Supplied with front flange in anodized aluminium with "silver" finish - 250 x 50 mm, thickness 2.5 mm for recess-mounting on the same plane of the panel surface for aligned recessed flush fitting in bottom of plane using front flange.</p> <p>Cover pre-assembled and fixed into the flange niche.</p> <p>♦ In this case, it is advisable to prepare sunk milling during the panel machining phase.</p>	<p>034982HW2U</p>	
<p>Assembly type 3 for conventional flush mounting with front flange overlapping door frame</p> 	<p>SLIM-DUALUX No-touch stop and go display type 3 "CLICK & GO" technology for traditional recessed fitting using flange.</p> <p>Supplied with front flange in anodized aluminium with "silver" finish - 250 x 50mm, thickness 4 mm for flush mounting.</p> <p>Cover pre-assembled and fixed into the flange niche.</p> <p>Mounting can be carried out "on site", directly onto the installed door frame.</p>	<p>034983HW2U</p>	
<p>Assembly type 4 for surface mounting with using housing</p> 	<p>SLIM-DUALUX No-touch stop and go display type 4 "CLICK & GO" technology for mounting placed on surface using housing.</p> <p>With extra-strong protective housing, made in anodized silver finish aluminium (35 x 25 x 215 mm).</p> <p>Self-adhesive cover in polycarbonate, provided separately and designed to be used as final cover to hide the 4 fixing screws of the housing on the door frame.</p> <p>Useful when you wish to avoid recess-mounting or cuts on the door frame.</p>	<p>034984HW2U</p>	
<p>Assembly type 5 for recessed wall-mounting with flange and wall-mounting receptacle</p> 	<p>SLIM-DUALUX No-touch stop and go display type 5 "CLICK & GO" technology for recessed assembly using flange and wall box.</p> <p>Supplied with front flange in anodized aluminium with "silver" finish - 250 x 50 mm, thickness 4 mm, to be fixed to the housing by placing on wall surface.</p> <p>Self-adhesive cover in polycarbonate pre-assembled and fixed into the flange niche.</p> <p>Also fitted with wall box with "wings" for rapid anchoring (65 x 30 x 230 mm), in plastic taken from single block to be assembled "in a niche" in the wall to house the body of the stop and go display No-touch.</p> <p>Wall niche and cable channel to be prepared beforehand.</p>	<p>034983HW2U</p>	


Special configurations available at extra charge: Cover with your logo and/or customized.

For sizes, measurements and details of chasing, application examples and connection diagrams, see page 23.


Assembly type 2 fully aligned at milling for recess-mounting with front flange on the same plane of the panel surface

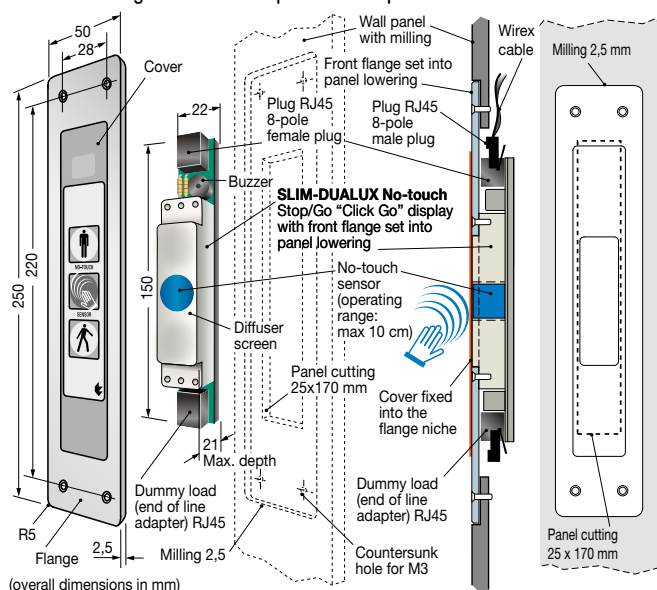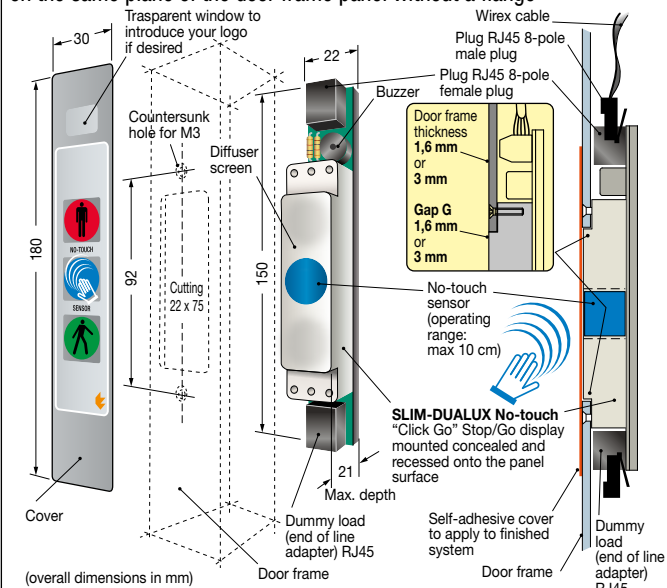


Assembly type 3 for conventional flush mounting with front flange overlapping door frame

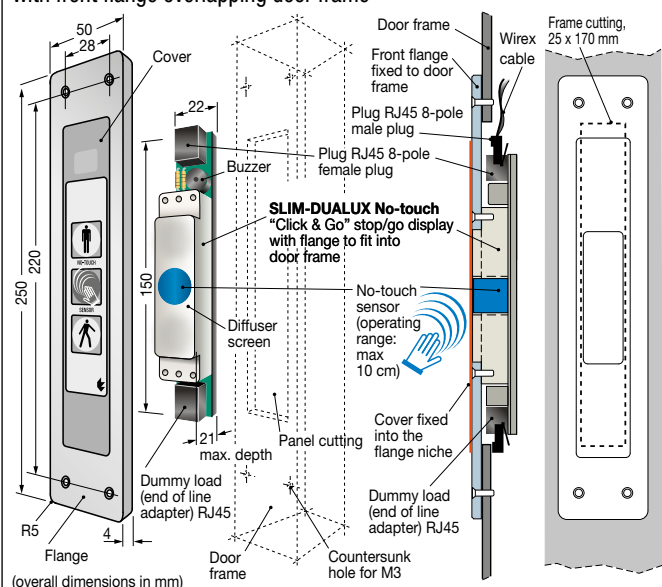


Assembly type 4 for surface mounting with using housing

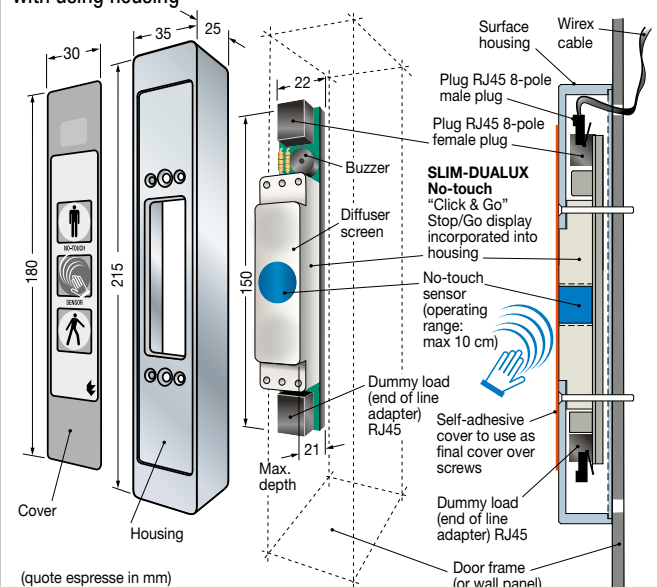

Assembly type 5 for recessed mounting in wall-mounting receptacle with flange and wall-mounting receptacle

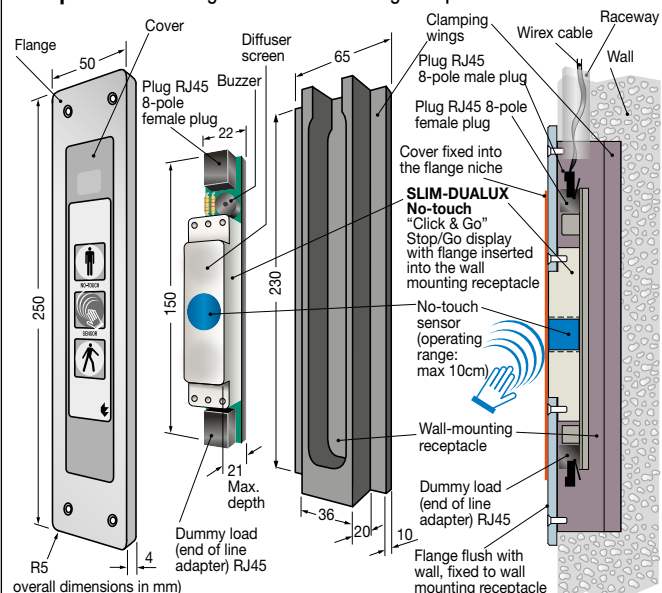

Examples of Wirex fast connecting cables for “CLICK & GO” models

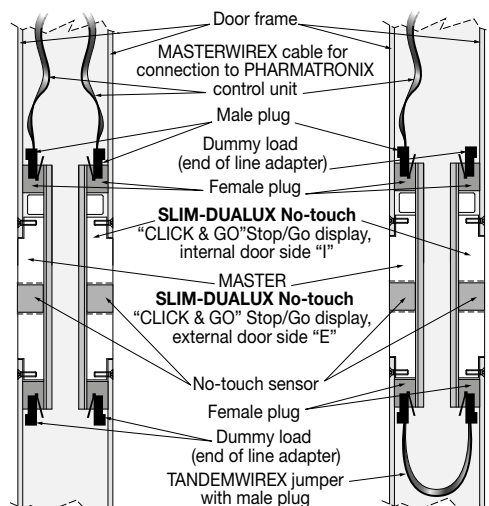

SINGLE CONFIGURATION
Each Stop/Go display has its own
MASTERWIREX control cable.

MASTER-SLAVE CONFIGURATION
Two Stop/Go displays coupled in "tandem" by means of a TANDEMWIREX jumper and one MASTERWIREX control cable.